

▶ **MT-2019****Protective Multifunction Analog Multimeter**

ACV test



DCA test



Overload Protection

Continuity Check Buzzer

DCV	0.1/2.5/10/50/250V $\pm 3.0\%$ FSD, 1000V $\pm 4.0\%$ FSD
ACV	10/50/250V $\pm 4.0\%$ FSD, 1000V $\pm 5.0\%$ FSD
DCA	0.05/2.5/25/250 mA $\pm 3.0\%$ FSD
Resistance	$\times 1(0.2\sim 2k\Omega) / \times 10(2\sim 20k\Omega) / \times 100(20\sim 200k\Omega) / \times 1k(200\sim 2M\Omega) / \times 10k(2k\sim 20M\Omega) \pm 4.0\%$ ARC of scale length
Capacitance	C(RX1K):2000uF (Approx.)Max
Battery check	1.5 / 9V
hFE	hFE: 0-1000
Continuity with beeper	Yes
LED & Diode test	Yes
Battery	1.5V AAA x2 & 9V(NEDA1604) x1
Accessories	Test lead
Size	160x105x40mm
Individual packing	Color box

▶ **MT-2017N****Protective Function Analog Multimeter**

ACV test



hFE test



Overload Protection

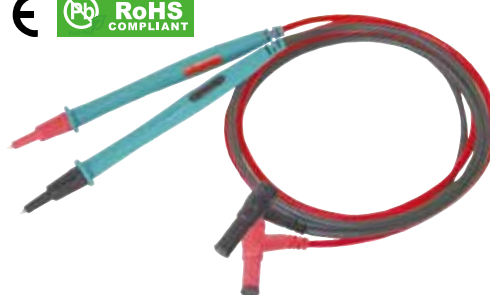
Gilded Test Leads

Null DCV • Resettable fuses

DCV	0.1/2.5/10/50/250V $\pm 3.0\%$ FSD, 1000V $\pm 4.0\%$ FSD
Null DCV	DC $\pm 5V$, $\pm 25V \pm 5.0\%$ FSD
ACV	10/50/250V $\pm 4.0\%$ FSD, 1000V $\pm 5.0\%$ FSD
DCA	50uA/2.5m/25m/250mA $\pm 3.0\%$ FSD, 10A $\pm 4.0\%$ FSD
Resistance	$\times 1(0.2\sim 2k\Omega) / \times 10(2\sim 20k\Omega) / \times 100(20\sim 200k\Omega) / \times 1k(200\sim 2M\Omega) / \times 10k(2k\sim 20M\Omega) \pm 4.0\%$ ARC of scale length
Capacitance	C(R $\times 1k$): 2000uF(Approx.) Max
Battery check	1.5V/9V
Transistor check	Yes
Diode & LED test	Yes
Continuity with beeper	Yes
Front panel controls	Range selector switch with "OFF" position, 0 Ω adjust knob
Battery	1.5V AAA x 2 and 9V(NEDA1604) x 1
Size	171 x 108 x 37mm
Individual packing	Color box

▶ **MT-9905****Test Lead**
**Right-angle shrouded
Banana plugs**

- One pair comfort grip probes with protective cap for user comfort and safety.
- Durable quality PVC insulated test leads with right-angle shrouded banana plugs.
- Banana plugs are molded directly to the wire for superior pull strength.
- Needle tip test probe, allowing easy access of hard to reach test points.
- Compatible with most multimeters that accept safety style sheath banana plugs.

▶ **MT-9906 / MT-9907****Test Lead**

MT-9906



MT-9907

- One pair comfort grip probes with protective cap for user comfort and safety.
- Durable quality PVC insulated test leads with right-angle shrouded banana plugs.
- Needle tip test probe, allowing easy access of hard to reach test points.
- Compatible with most multimeters that accept safety style sheath banana plugs.

Specifications	Probe	Hand piece	Lead length	Plug	OAL	Weight	Individual Packing
MT-9905	Ø2x17mm	125mm	1000mm	Ø4.2x15mm	1200mm	75g	Blister card
MT-9906		146mm	900mm		1120mm	78.5g	
MT-9907		129mm			1100mm	74g	